



PERFORMANCE PLUS OILS AND LUBRICANTS
 PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

FULL SYNTHETIC PASSENGER CAR MOTOR OILS

Performance Plus® Full Synthetic Passenger Car Motor Oils are engineered using high-quality premium base oils and state-of-the-art performance additives. Formulated to meet or exceed the latest ILSAC GF-6A and API SP requirements and are backwards compatible with previous industry standards (SN PLUS and SN), they also meet the requirements to be categorized as API Resource Conserving. Our proprietary formula is designed to meet or exceed the latest demands of turbocharged, high powered, high-efficiency gasoline and propane engines in passenger cars and light duty trucks. Additionally, they are formulated for Performance and Protection as they keep engines clean by fighting sludge and protect engines against low-speed pre-ignition (LSPI) in turbo-charged gasoline direct injection engines (TGDI) all the while providing oxidation control to extend the time between drain intervals.

PERFORMANCE PLUS PROPERTIES				
SAE Viscosity Grade	0W-20	5W-20	5W-30	
API Service Category	SP	SP	SP	
ILSAC Specification	GF-6A	GF-6A	GF-6A	
Kinematic Viscosity				
	cSt @ 40°C	47.7	50.3	63.8
	cSt @ 100°C	8.8	8.9	11.0
Viscosity Index	165	159	165	
CCS Viscosity				
	cP @ -30°C	---	4,100	4,300
	cP @ -35°C	5,900	---	---
MRV Viscosity				
	cP @ -40°C	< 30,000	---	---
	cP @ -35°C	---	< 30,000	< 30,000
TBN	7.1	7.1	7.1	
Evaporative Loss, NOACK, wt%	< 15	< 15	< 15	
Specific Gravity 15.6°C (60°F)	0.846	0.848	0.848	
Flash Point, °C (°F)	230 (446)	234 (453)	235 (455)	
Pour Point, °C (°F)	-42 (-44)	-42 (-44)	-42 (-44)	
Sulfated Ash, wt%	0.8	0.8	0.8	
Color (ASTM)	3.0	3.5	3.5	

Approvals and Specifications

Performance Plus® Full Synthetic Passenger Car Motor Oils have been formally approved to meet or are suitable for use* in the following specifications:

API SP Resource Conserving ILSAC GF-6A
 API SN Plus Resource Conserving
 Ford WSS-M2C962-A1 (0W-20)*
 Ford WSS-M2C960-A1 (5W-20)*
 Ford WSS-M2C961-A1 (5W-30)*
 General Motors 6094M*

Since Performance Full Synthetic Passenger Car Motor Oils meet the latest stringent requirements of leading automobile manufacturers, they are suitable for the following OEMs (where applicable**):

Ford	Toyota	General
Motors		
Lincoln	Lexus	Chevrolet
Mazda	Kia	Cadillac
Jaguar	Hyundai	GMC
Nissan	Chrysler	Buick
Infiniti	Dodge	Mitsubishi
Honda	Jeep	Subaru
Acura	RAM	Suzuki
Volkswagen	Volvo	Land Rover

Note: Values shown above are representative of current production and may vary within modest ranges

**Information regarding recommended maintenance and equipment operating conditions can be found by referencing Original Equipment Manufacturer's (OEM) owner's manual and recommended lubricant grades.

All company, product and service names inclusive of product and brand names are property of their respective owners and for identification purpose only. Whilst some products may carry the respective approvals, visuals are not intended to serve as a recommendation or endorsement

Rev.7/23



PERFORMANCE PLUS OILS AND LUBRICANTS
PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

FULL SYNTHETIC PASSENGER CAR MOTOR OILS


Features and Benefits: Performance Plus Full Synthetic Passenger Car Motor Oils are designed to exceed the performance and protection demands of today's engines and drivers. Proven and trusted by those who expect the best, Performance Plus Full Synthetic Passenger Car Motor Oils are designed to deliver performance and superior protection in harsh environments. In addition to performance and protection, Performance Plus Full Synthetic Passenger Car Motor Oils:

Protects against low speed pre-ignition (LSPI)
Formulated reduce sludge and contaminant formation
Includes additives to be thermally stable
Enhanced lubrication properties
Contains additives for exceptional cleanliness

Extending the life of the engine
Maximizing engine efficiency and performance
Maintains performance at high temperature and speeds
Improving fuel economy
Protecting the engine from contamination and sludge


Proven and Trusted: The foundation of all Performance Plus products is the tested, proven and trusted base oil which exceeds the performance of many of the major oil refiners. Not all engine oils are created equal and our finished lubricants start at a higher level than the competition due to our formulated blend of high quality base oils and additives.

ILSAC GF-5 v. ILSAC GF-6

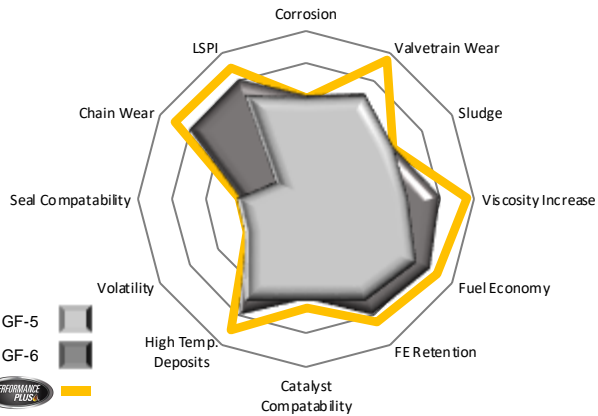

Performance Plus® Full Synthetic Passenger Car Motor Oils not only meet the stringent challenge of the new ILSAC GF-6 specifications for wear protection, Low Speed Pre-Ignition, Fuel Economy and Cleanliness, they frequently exceed expectations.

Synthetic v. Conventional

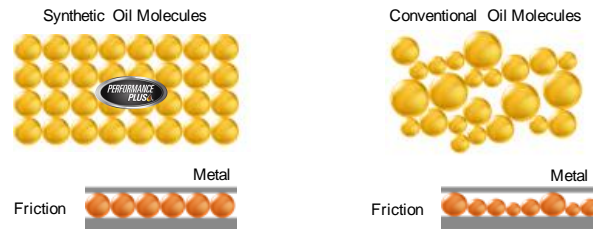

Performance Plus® Full Synthetic Passenger Car Motor Oils deliver superior lubrication to vital components faster and more efficiently v. formulas formulated using mineral base oils. The improved results include:

Enhanced Performance

- Extended Intervals
- Advanced Fuel Economy
- Quicker Start-ups
- Fewer Emissions

Enhanced Protection

- All-Weather Protection
- Improved thickening resistance
- Cleaner Oil
- Cleans deposits and sludge

Health and Safety: Information detailing health and safety can be found in the corresponding Safety Data Sheet on the Performance Plus website. Performance Plus products contain petroleum distillates and are not likely to pose any significant health or safety hazards. Gloves should be used to avoid any contact - should there be contact with skin, washing with soap and water is advised. If ingested, call a poison center or doctor - do not induce vomiting.

Storage: Performance Plus products should not be stored where the temperatures are above 140° F (60° C) or near sparks and flames. Products should be stored under cover and away from the reach of children. In case where drums cannot be under cover, they should be laid horizontally to avoid any potential contaminants.

Disposal: All efforts should be made to protect the environment. Please properly dispose of used motor oil and lubricants. Should you need any assistance please contact your sales representative or for information on how Safety-Kleen's used motor oil collection services.

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev. 7/23