



PERFORMANCE PLUS OILS AND LUBRICANTS
 PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

AUTOMATIC TRANSMISSION FLUID (DEX III / MERCON)

Performance Plus® Automatic Transmission Fluid is formulated to reduce wear, protect against corrosion and last longer in vehicle with automatic and power shift transmissions. Our product is built on the foundation of our highly refined base oils which greatly enhances the products ability to remain in grade over a wider temperature range and even under extreme conditions. Performance Plus Automatic Transmission Fluid is proven to deliver exceptional frictional and anti-wear properties, extending the life of the transmission by smoothing shifting and reducing maintenance costs related to wear.

PERFORMANCE PLUS PROPERTIES	
Kinematic Viscosity cSt @ 40°C cSt @ 100°C	32.9 7.1
Viscosity Index	187
Brookfield Viscosity cP @ -40°C	15,000
API Gravity	34.8
Specific Gravity 15.6°C (60°F)	0.851
Flash Point, °C (°F)	204 (399)
Pour Point, °C (°F)	-51 (-60)
Color	Red

Approvals and Specifications

Performance Plus® Automatic Transmission Fluid (DEX III / MERCON) are suitable for use in the following specifications:

DEXRON® III	Ford MERCON®
DEXRON® IIE	Ford ESP-M2C138-CJ
DEXRON®	Ford ESP-M2C166-H
Allison C-3 / C-4	Ford Type A Suffix A
Caterpillar TO-2	

Since Performance Plus Automatic Transmission Fluid meet the latest stringent requirements of leading automobile manufacturers, they are suitable for the following OEMs (where applicable*):

General Motors	Toyota
Lincoln	Kia
Mazda	Hyundai
Lexus	Mitsubishi
GMC	Nissan
Chevrolet	Infiniti
Dodge	Honda
Jeep	Acura
Chrysler	Volvo
Buick	Subaru
Land Rover	Jaguar
Dodge	Mercedes-Benz
Volkswagen	BMW
Buick	Cadillac

Note: Values shown above are representative of current production and may vary within modest ranges

*Information regarding recommended maintenance and equipment operating conditions can be found by referencing Original Equipment Manufacturer's (OEM) owner's manual and recommended lubricant grades.

Rev.9/19



PERFORMANCE PLUS OILS AND LUBRICANTS
PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

AUTOMATIC TRANSMISSION FLUID (DEX III / MERCON)


Features and Benefits: OEMs and drivers demand Performance and Protection in their automatic transmissions, and those who demand the best for their vehicle demand Performance Plus Automatic Transmission Fluid. Our product has been tested, proven and is trusted for quality. In addition to Protection and Performance, Performance Plus Automatic Transmission Fluid delivers:

- Excellent frictional properties
- Formulated for anti-wear protection
- Outstanding corrosion protection
- Compatible with all common seal materials
- Superior low temperature performance

- Providing smooth and quiet gear shifts
- Extending the life of the transmission
- Essential protection for bushings, gears and clutch plates
- Can be in a wide array of vehicles
- Protecting components during critical wear conditions

Proven and Trusted: The foundation of all Performance Plus products is the tested, proven and trusted base oil which exceeds the performance of many of the major oil refiners. Our finished lubricants start at a higher level than the competition due to our formulated blend of high quality base oils and additives.

Viscosity Index

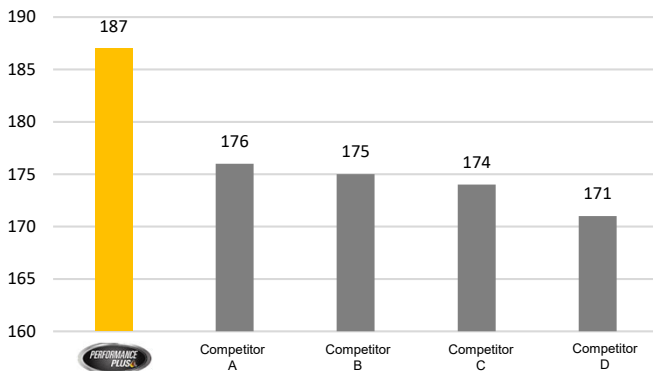

Performance Plus® has a superior Viscosity Index, enhancing performance over a wider temperature range than the leading competitors, protecting transmissions from wear at extreme high and low temperature environments.

Wear and Temperature



The image on the left shows damage from wear, and the image on the right shows the protection provided by Performance Plus.

The greatest amount of wear occurs at low temperature start-up, Performance Plus® is formulated to protect critical transmission components in these conditions to greatly extend the life of your transmission.

Health and Safety: Information detailing health and safety can be found in the corresponding Safety Data Sheet on the Performance Plus website. Performance Plus products contain petroleum distillates and are not likely to pose any significant health or safety hazards. Gloves should be used to avoid any contact - should there be contact with skin, washing with soap and water is advised. If ingested, call a poison center or doctor - do not induce vomiting.

Storage: Performance Plus products should not be stored where the temperatures are above 140° F (60° C) or near sparks and flames. Products should be stored under cover and away from the reach of children. In case where drums cannot be under cover, they should be laid horizontally to avoid any potential contaminants.

Disposal: All efforts should be made to protect the environment. Please properly dispose of used motor oil and lubricants. Should you need any assistance please contact your sales representative for information on how Safety-Kleen's used motor oil collection services.

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.9/19