



**PERFORMANCE PLUS OILS AND LUBRICANTS**  
PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

## FULL SYNTHETIC MV-ATF DEXRON® VI / MERCON® LV LICENSED FLUID

**Performance Plus® Full Synthetic MV-ATF Dexron® VI / Mercon® LV Licensed Fluid** is specially formulated with a unique combination of synthetic base stocks and an advanced additive technology to ensure peak performance in the latest automatic transmissions. This premium quality product is further enhanced to meet and exceed the frictional and wear requirements of most automatic transmissions regardless of age. Full Synthetic Multi-Vehicle Automatic Transmission Fluid carries formal approval of MERCON® LV and DEXRON® VI, recognized by both Ford Motor Company and General Motors for performance and protection.

PERFORMANCE PLUS PROPERTIES	
Kinematic Viscosity cSt @ 40°C	28.7
cSt @ 100°C	5.9
Viscosity Index	154
Brookfield Viscosity cP @ -40°C	10,200
Copper Corrosion	1B
API Gravity	31.5
Specific Gravity 15.6°C (60°F)	0.868
Flash Point, °C (°F)	208 (406)
Color	Red

### Approvals and Specifications

Performance Plus® Full Synthetic MV-ATF Dexron® VI/Mercon® LV has been formally approved to meet the following specifications:

MERCON® LV	License #MLV160802
DEXRON® VI	License #J-60187

Since Performance Plus® Full Synthetic Multi-Vehicle ATF meet the latest stringent requirements of leading automobile manufacturers, they are suitable for the following OEMs (where applicable\*\*):

Chevrolet	General Motors
Lexus	Acura
Lincoln	Kia
Mazda	Fiat
GMC	Infiniti
Dodge	Jeep
Chrysler	Volvo
Buick	Subaru
Land Rover	Jaguar
Cadillac	Mercedes-Benz
Volkswagen	BMW
Mitsubishi	Volvo

Note: Values shown above are representative of current production and may vary within modest ranges. Not recommended for DCT or CVT Transmissions

\*A full list of Applications is listed on Page 3

\*\*Information regarding recommended maintenance and equipment operating conditions can be found by referencing Original Equipment Manufacturer's (OEM) owner's manual and recommended lubricant grades.

All company, product and service names inclusive of product and brand names are property of their respective owners and for identification purpose only. Whilst some products may carry the respective approvals, visuals are not intended to serve as a recommendation or endorsement. Rev. 10/23



**PERFORMANCE PLUS OILS AND LUBRICANTS**  
 PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE


**FULL SYNTHETIC MV-ATF DEXRON® VI / MERCON® LV LICENSED FLUID**

**Features and Benefits:** Performance and Protection in modern transmissions and demanded by drivers, and those who demand the best for their vehicle demand Performance Plus Automatic Transmission Fluid. Our product has been tested, proven and is trusted to deliver the very best in the industry. In addition, Performance Plus Automatic Transmission Fluid delivers:


Formulated to protect against oxidation  
 Superior additives to enhance friction properties  
 Excellent anti-wear protection  
 Thermally stable formulation  
 Outstanding low temperature performance

Protecting for bushings, gears and clutch plates  
 Avoiding clutch shudder and slippage  
 Extending the life of the transmission  
 Performing in extreme temperature conditions  
 Essential protection to vital transmission components

**Proven and Trusted:** The foundation of all Performance Plus products is the tested, proven and trusted base oil which exceeds the performance of many of the major oil refiners. Our finished lubricants start at a higher level than the competition due to our formulated blend of high quality base oils and additives.

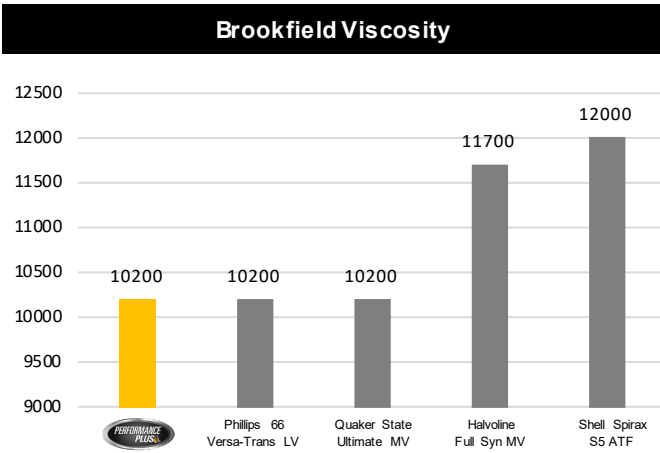

Performance Plus® delivers superior lubrication flow to vital components faster and more efficiently thus significantly reducing critical transmission wear during cold temperature operation.

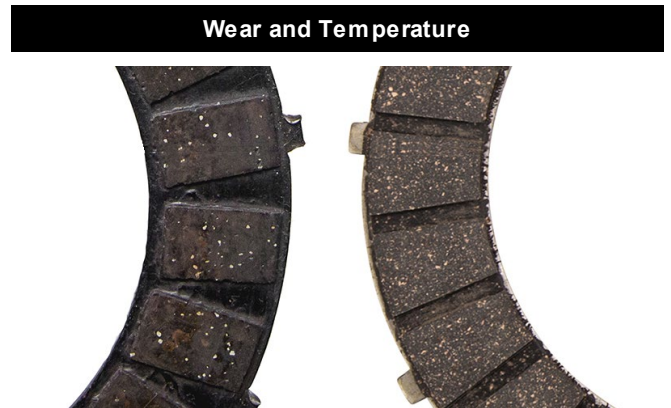

The image on the left shows damage from wear, and the image on the right shows the protection provided by Performance Plus.

The greatest amount of wear occurs at low temperature start-up, Performance Plus® is formulated to protect critical transmission components in these conditions to greatly extend the life of your transmission.

**Health and Safety:** Information detailing health and safety can be found in the corresponding Safety Data Sheet on the Performance Plus website. Performance Plus products contain petroleum distillates and are not likely to pose any significant health or safety hazards. Gloves should be used to avoid any contact - should there be contact with skin, washing with soap and water is advised. If ingested, call a poison center or doctor - do not induce vomiting.

**Storage:** Performance Plus products should not be stored where the temperatures are above 140° F (60° C) or near sparks and flames. Products should be stored under cover and away from the reach of children. In case where drums cannot be under cover, they should be laid horizontally to avoid any potential contaminants.

**Disposal:** All efforts should be made to protect the environment. Please properly dispose of used motor oil and lubricants. Should you need any assistance please contact your sales representative for information on how Safety-Kleen's used motor oil collection services.

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev . 10/23



## PERFORMANCE PLUS OILS AND LUBRICANTS

PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

### Applications\*

Performance Plus® has not only proven and tested to bring power and protection, it can also be utilized in a wide array of applications making it one of the most versatile products in the industry. Performance Plus® Full Synthetic Multi-Vehicle ATF can be used in the following applications:

Acura ATF-Z1  
Aisin Warner JWS 3309 (T-IV)  
Aisin Warner JWS 3324 (WS)  
Aisin Warner AW-1  
Aisin Warner AW-2, PSA 16 350 560 80, VW G 053 001  
Allison C-3 & C-4  
American Motors ATF +3 (MS7176-E)  
AML Oil No. 4G43A9A509/AA/S  
ATF RED 1, RED 1K  
Audi 5 HP LT71141 (ZF 5 HP 18FL/19FL/24A)  
Audi/VW G 052 025-A2  
Audi/VW G 053 025-A2  
Audi/VW G 052 162-A1/A2  
Audi/VW G 055 025 A2 (JWS 3309)  
Audi/VW G 052 162 (ZF Lifeguardfluid 5)  
Audi/VW G 052 162 (ZF No. S671 090 170)  
Audi/VW G 055 005 -A, -A1, -A2, -A6 (ZF LifeguardFluid 6) (ZF No. S671 090 255)  
Audi/VW G 055 162-A2, -A6 (ZF Lifeguardfluid 6 Plus)  
Audi/VW G 055 162-A2, -A6 (ZF No. S671 090 281)  
Audi/VW G 060 162 (ZF Lifeguardfluid 8)  
Audi/VW G 060 162 (ZF No. S671 090 312)  
Audi/VW G 052 990  
Audi/VW G 055 540 (A2)  
Audi/VW 052 055  
Bentley PY112995PA  
BMW JWS 3309 (T-IV)  
BMW LA2634  
BMW LT71141 (ZF 5 HP 18FL/19FL/24A)  
BMW ZF 5HP18FL, 5HP24, 5HP30  
BMW 7045E  
BMW ETL 8072B  
BMW ATF 6  
Bosch TE-ML 09  
CAT TO-2  
Chrysler ATF+, +2, +3 (MS 7176E)  
Chrysler/Dodge MOPAR AS 68 RC  
Chrysler/Dodge MOPAR AS 69 RC (T-IV)  
Chrysler/Dodge MOPAR JWS 3309  
Chrysler/Dodge/Jeep Borg Warner 68049954AA  
Chrysler/Dodge/Jeep MOPAR SP IV, 68171866AA/68171869AA  
Chrysler/Dodge/Jeep 05127382AA  
Chrysler/Dodge/Jeep 68043742AA  
Chrysler/Dodge/Jeep 68157995AA  
Chrysler/Dodge/Jeep 68157995AB  
Chrysler/Dodge/Jeep 68218925AA  
Chrysler/Dodge/Jeep 68218925AB  
Chrysler/Dodge/Jeep 68171866AA  
Daewoo LT 71141  
Daihatsu AMMIX ATF D-II  
Daihatsu AMMIX ATF D-III SP  
Esso LT 71141  
FIAT T-IV type, JWS 3309  
FIAT 9.55550-AV5  
FIAT 9.55550-AV6  
Ford ATF C-ML5  
Ford MERCON®  
Ford MERCON® LV (FF-WSS-M2C-938A/SF, XT-10 QLV)  
Ford FNR5 (Mazda M5, XT-9-QMM5)  
Ford WSS M2C 138CJ, 166H  
Ford WSS M2C 922A1, 924A (XT-8-QAW) JWS 3309  
Ford/Lincoln/Mercury XT-2-QDX (M)  
Ford/Lincoln/Mercury XT-2-QSM (Syn)  
Ford/Lincoln/Mercury XT-6-QSP or -DSP (SP)  
Ford ESP-M2C166H, XL-12  
Fuso ATF-II  
Fuso ATF-SPIII  
Fuso ATF-A4  
GM9986195 (Aisin AW, JWS 3309)  
GM TASA  
GM DEXRON®-II, -IID, -IIE, -IIIG, -IIIH, & -VI  
GM 1940700  
GM 1940767  
GM 21005966  
GM 22717466  
GM 88900925  
GM 9986195  
GM 93160393  
GM/GMC/Opel/Saturn AW1  
GM/GMC/Opel/Saturn VI  
GM/GMC/Opel/Saturn 88863400  
GM/GMC/Opel/Saturn 88863401  
GM Transfer Case (AutoTrak II)  
Hino Blue ribbon ATF  
Honda ATF-Z1 (except in CVTs)  
Honda ATF Ultra II  
Honda DW-1  
Honda Type 3.0  
Honda Type 3.1: 08263-999-01HE (EU), 08200-9017 (USA), (ZF Lifeguard Fluid 9) and (ZF No. AA01.500.001)  
Hyundai/Kia SP-IV (00232-1904/04500-00115)  
Hyundai/Kia SP-IV M (SP4-M)  
Hyundai/Kia SPH-IV  
Hyundai/Kia SP-IV-RR  
Hyundai/Kia SP-III  
Hyundai/Kia Dex-II/ SP-II  
Hyundai/Kia JWS 3314  
Hyundai/Kia NWS 9638  
Hyundai/Kia 040000C90SG  
Hyundai/Kia NUMM040 CH20 Red-1  
Idemitsu K17 3100 PL085  
ISUZU ATF WSI  
ISUZU BESCO ATF-II  
ISUZU BESCO ATF-III  
ISUZU BESCO ATF SP  
ISUZU SCS Fluid  
ISUZU 08200-9001  
Jaguar ATF 3403 M115, ATF 3403-M115  
Jaguar ATF LT71141, ZF 5HP24  
Jaguar JLM20238  
Jaguar ATF 3403 JLM20238  
Jaguar K17  
Jaguar JLM 20292  
Jaguar Fluid 8432  
Jaguar 02JDE26444  
Jaguar WSS-M2C922A1  
JASO M315-2013 1A

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev. 10/23



## PERFORMANCE PLUS OILS AND LUBRICANTS

PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

### Applications\*

Performance Plus® has not only proven and tested to bring power and protection, it can also be utilized in a wide array of applications making it one of the most versatile products in the industry. Performance Plus® Full Synthetic Multi-Vehicle ATF can be used in the following applications:

JASO M315-2013 1A-LV  
JASO M315-2013 2A  
JEEP ATF+3  
KIA ATF SP-II  
KIA ATF SP-III  
KIA ATF SP-IV  
KIA ATF SP-IVM  
KIA ATF Red 1  
Land Rover LR023288  
Land Rover LR0022460  
Land Rover TYK500050  
Lexus JWS 3309  
MAN 339A  
Maserati 231603  
Mazda ATF D-II, M-III, M-V, FZ, F-1, S-1, & N-1  
MAZDA ATF 3317  
Mazda ATF A7  
MB ZF 4HP20  
MINI COOPER T-IV  
Mitsubishi Diaqueen SK  
Mitsubishi Diaqueen SP-II  
Mitsubishi Diaqueen SP-III  
Mitsubishi Diaqueen SP-IV  
Mitsubishi Diaqueen AW  
Mitsubishi Diaqueen J2  
Mitsubishi Diaqueen J3  
Mitsubishi Diaqueen ATF-MA1  
Mitsubishi Diaqueen ATF PA  
NAG 1 (Chrysler, Jeep, Cherokee)  
Nissan Matic Fluid C, D, J, K, and S  
Nissan Matic Fluid P  
Nissan Matic Fluid W  
Opel/GM 19 40 700  
Opel/GM 19 40 767  
Opel/GM 21005966 Transaxle  
Opel/GM 22 17466  
Opel/GM 88900925  
Opel/GM 9986195  
Peugeot ZF 4HP20  
Peugeot/Citroen Z 000169756  
Peugeot/Citroen (PSA) AL4 Automatic gearbox oil (#9730.AE)  
Porsche ZF 5HP19FL, ZF 5HP20, LT71141  
Porsche ATF 3403-M115  
Porsche T-IV (JWS 3309)  
Porsche 000 043 205 09  
Porsche 999 917 547 00 (A2)  
Porsche 000 043 205 28  
Porsche Z 000169756  
PSA B71 2340  
Renault DPO/AL4  
Renault Matic D2  
Renault Samsung SATF-D  
Saab T-IV (JWS 3309)  
Saab Power Steering Fluid 2634, 45 30 09 800, 93160548  
Saab 93 165 147  
Saab 93 160 393  
Saturn T-IV (JWS 3309)  
Scion (all vehicles)

Shell 3403, M115, LA 2634  
Shell L 12108  
Shell M-1375.4  
Ssang yong DSIH 5M-66  
Subaru ATF  
Subaru K0140Y0700  
Subaru ATF 5AT  
Subaru DEXRON®-II  
Subaru ATF & ATF HP  
Subaru Opel Original ATF 09117946/93160393  
Suzuki ATF AW-1  
Suzuki AT OIL 5D06  
Suzuki ATF 2326  
Suzuki ATF 2384K  
Suzuki JWS 3309  
Suzuki ATF 3314  
Suzuki ATF 3317  
Texaco 7045-E  
Texaco 8072B  
Texaco N402  
Toyota ATF D-II & D-III  
Toyota ATF T-III & T-IV  
Toyota ATF WS  
Vickers M2950-S, I-286-S  
Voith 55.6335.xx (G607)  
Volvo 97325  
Volvo 97335  
Volvo CE 97340  
Volvo PN 1161521  
Volvo PN 1161540/1161640  
Volvo PN 31256774/31256675  
Volvo PN 1161621  
VW 5 HP (ZF 5 HP 30)  
VW 5HP (18FL, 30)  
VW 5HP (19FL, 24A)  
VW G-055-025 A2 (JWS 3309)  
VW G055 540 (A2)  
VW G 052 162 (ZF Lifeguardfluid 5)  
VW G 055 162-A2, -A6 (ZF Lifeguardfluid 6 Plus)  
VW G 055-A, -A2 (ZF LifeguardFluid 6)  
VW G 060 162 (ZF Lifeguardfluid 8)  
VW TL 521 62  
ZF all 3 & 4 speed transmission  
ZF 6 speed transmissions  
ZF 8 speed transmissions  
ZF 9 speed transmissions  
ZF Service-fill for 8 and 9 speed step-ATs  
ZF TE-ML 05L  
ZF TE-ML 09  
ZF TE-ML 11A, 11B  
ZF TE-ML 21L  
**eMobility Applications**  
Ford Escape Hybrid eCVT  
Jatco JR712E  
Mazda SKYACTIVE-HYBRID  
Nissan Altima Hybrid  
Tesla Model S, Model 3, and Model X  
Toyota THSII/Toyota Prius

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev. 10/23