



PERFORMANCE PLUS OILS AND LUBRICANTS
PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

SYNTHETIC BLEND HIGH MILEAGE PASSENGER CAR MOTOR OILS

Performance Plus® Synthetic Blend High Mileage Passenger Car Motor Oils are formulated using high-quality KLEEN+ base oils and specific performance additives designed to help stop leaks and reduce oil consumption by conditioning seals and gaskets while reducing sludge and damaging deposits. This proprietary formula is specially engineered for vehicles with over 75,000 miles and to meet or exceed the latest demands of turbocharged gasoline and propane engines in passenger cars and light duty trucks. Additionally, they meet or exceed the latest ILSAC GF-6 and API SP Resource Conserving requirements and are backwards compatible with previous industry standards (SN PLUS and SN). Performance and Protection are the foundation of all Performance Plus products which is why they are designed to keep engines clean and protect engines against low-speed pre-ignition (LSPI) in turbo-charged gasoline direct injection engines (TGDI).

PERFORMANCE PLUS PROPERTIES

SAE Viscosity Grade	5W-20	5W-30	10W-30
API Service Category	SP	SP	SP
ILSAC Specification	GF-6A	GF-6A	GF-6A
Kinematic Viscosity cSt @ 40°C	52	66.1	69.8
cSt @ 100°C	8.7	10.9	10.7
Viscosity Index	146	155	142
CCS Viscosity cP @ -30°C	6,100	6,200	---
cP @ -25°C	---	---	5,100
MRV Viscosity cP @ -30°C	---	---	< 30,000
cP @ -35°C	< 30,000	< 30,000	---
TBN	7.0	7.0	7.0
Evaporative Loss, NOACK, wt%	< 15	< 15	< 15
Specific Gravity 15.6°C (60°F)	0.857	0.857	0.860
Flash Point, °C (°F)	236 (457)	234 (453)	240 (464)
Pour Point, °C (°F)	-42 (-44)	-42 (-44)	-39 (-38)
Sulfated Ash, wt%	0.8	0.8	0.8
Color (ASTM)	3.5	3.5	3.5

Note: Values shown above are representative of current production and may vary within modest ranges

Approvals and Specifications

Performance Plus® Synthetic Blend High Mileage Passenger Car Motor Oils have been formally approved to meet or are suitable for use* in the following specifications:

API SP Resource Conserving ILSAC GF-6
API SN Plus Resource Conserving
Ford WSS-M2C960-A1 (5W-20)*
Ford WSS-M2C961-A1 (5W-30)*
General Motors 6094M*

Since Performance Plus Synthetic Blend High Mileage Passenger Car Motor Oils meet the latest stringent requirements of leading automobile manufacturers, they are suitable for the following OEMs (where applicable**):

Ford	Toyota
Lincoln	Lexus
Mazda	Kia
General Motors	Hyundai
GMC	Suzuki
Chevrolet	Nissan
Cadillac	Infiniti
Buick	Honda
Dodge	Acura
Jeep	Volvo
Chrysler	Subaru
RAM	Mercury
Volkswagen	Mitsubishi
Land Rover	Jaguar

**Information regarding recommended maintenance and equipment operating conditions can be found by referencing Original Equipment Manufacturer's (OEM) owner's manual and recommended lubricant grades.

All company, product and service names inclusive of product and brand names are property of their respective owners and for identification purpose only. Whilst some products may carry the respective approvals, visuals are not intended to serve as a recommendation or endorsement

Rev.7/23



PERFORMANCE PLUS OILS AND LUBRICANTS
 PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

SYNTHETIC BLEND HIGH MILEAGE PASSENGER CAR MOTOR OILS


Features and Benefits: Performance Plus Synthetic Blend High Mileage Passenger Car Motor Oils are designed for performance and protection to meet the demands of older vehicles and those with higher miles. Tested, proven, and trusted quality are why those demanding the best turn to Performance Plus and why Performance Plus Synthetic Blend High Mileage products:

- Protects against low speed pre-ignition (LSPI)
- Formulated with seal conditioning agents
- Advanced Oxidation Resistance
- Improved Wear Protection
- Formulated with additives to improve Cleanliness

- Protecting engine components from damage
- Reducing leaks and lowering oil usage
- Increasing viscosity and high temp control
- Providing valve train and chain protection
- Controlling sludge build up in the engine

Proven and Trusted: The foundation of all Performance Plus products is the tested, proven and trusted base oil which exceeds the performance of many of the major oil refiners. Our finished lubricants start at a higher level than the competition due to our formulated blend of high quality base oils and additives.

BASE OIL COMPARISONS		Phillips 66	Motiva	Chevron	Mobil	KLEEN+	
BASE OIL CATEGORY		GROUP II	GROUP II	GROUP II	GROUP II+	GROUP II+	
VISCOSITY (CST @100°F)	(ASTM D445)	6.6	6.5	6.4	6.6	6.9	HIGHER VISCOSITY
VISCOSITY INDEX	(ASTM D2278)	100	104	104	109	117	HIGHER VI
COLD CRANK (-20°C)	(ASTM D5931)	2800	3100	2800	3100	2650	SUPERIOR COLD TEMP
NOACK VOLATILITY (%)	(ASTM D5800)	12	11	10	10	6	LOWER VOLATILITY

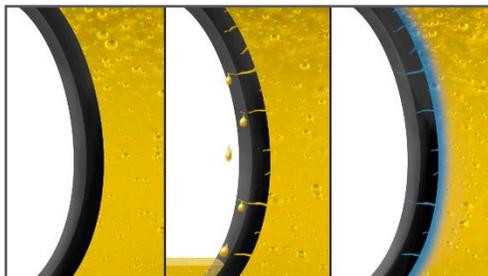

Performance Plus® Synthetic Blend High Mileage Passenger Car Motor Oils are blended with a special additive package designed for older vehicles or those with high miles (≥ 70,000 miles). These additives cause a chemical reaction with the elastomeric seals and gaskets to cause a slight swell to improve protection and aid in the sealing of leaks all the while continuing to provide sludge and deposit control.

Health and Safety: Information detailing health and safety can be found in the corresponding Safety Data Sheet on the Performance PLUS website. Performance PLUS products contain petroleum distillates and are not likely to pose any significant health or safety hazards. Gloves should be used to avoid any contact - do not have contact with skin, washing with soap and water is advised. If ingested, call a poison center or doctor - do not induce vomiting.

Storage: Performance PLUS products should not be stored where the temperatures are above 140° F (60° C) or near sparks and flames. Products should be stored under cover and away from the reach of children. In case where drums cannot be under cover, they should be laid horizontally to avoid any potential contaminants.

Disposal: All efforts should be made to protect the environment. Please properly dispose of used motor oil and lubricants. Should you need any assistance please contact your sales representative for information on how Safety-Kleen's used motor oil collection services.

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.7/23