
## **INTRODUCING OUR NEW** SPRAY-UNDER IMMERSION WASHERS





Our new line of spray-under immersion cleaners find grime you can't reach with a brush, for an all-around better clean.

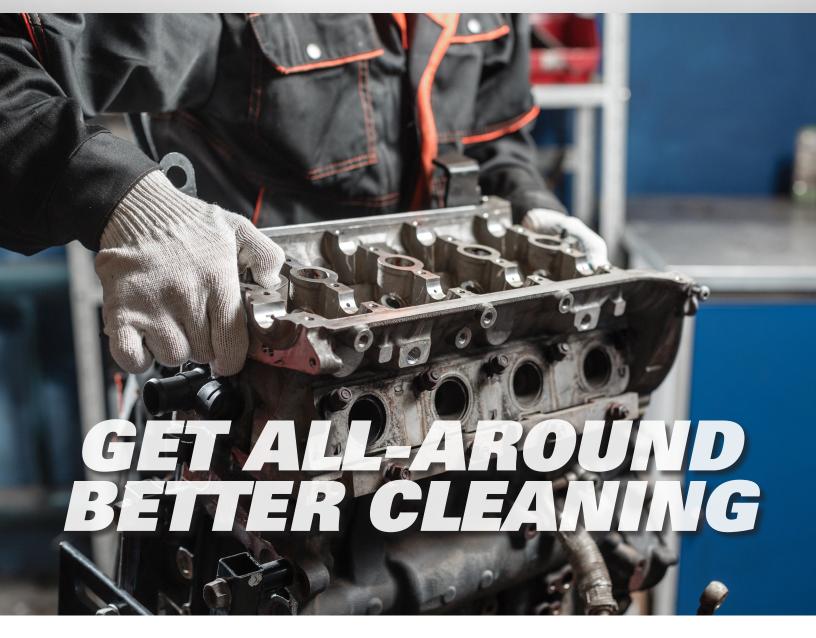

### IT'S LIKE COMBINING A JET WASHER WITH AN IMMERSION CLEANER.

# DUAL-ACTION SYSTEM COMBINES TRADITIONAL PLATFORM AGITATION WITH UNDERWATER JETS TO CREATE A POWERFUL BATH AGITATION FOR SUPERIOR CLEANING.

Heavy-duty stainless construction for long-lasting durability. Heavy-duty self-cleaning carriage lifts to top for easy loading and unloading of parts. Agitation with spray under immersion cleaning.





Powerful underwater jets enhance the platform-agitation cleaning process.

MODEL NUMBER	MODEL EM80	MODEL EM150	
SPECIFICATIONS	Overall Dimensions: 52.5" L x 34" W x 66.5" H Inside Dimensions: 44.5" L x 27.25" W x 28" D Shipping Dimensions: 56.5" L x 36.5" W x 56" H Carrier Dimensions: 42.5" L x 17.5" W Shipping Weight: 556 lbs Fluid Capacity: 80 gal Max Fluid Depth: 15.25" Min Fluid Depth: 9.25" Load Lift Over: 38" Load Capacity: 250 lbs Pump Voltage: 115 V/ 60 Hz/ 1 PH/ 1 Amp / Fractional HP Pump Voltage: 115 V/ 60 Hz/ 1 PH/ 30 Amp Heater Watts: 3000W Lift Requirements: 8 CFM @ 120 PSI	Overall Dimensions: 64" L x 44.5" W x 69.5" H Inside Dimensions: 57" L x 37.75" W x 30" D Shipping Dimensions: 66" L x 48" W x 51" H Carrier Dimensions: 53.5" L x 27.5" W Shipping Weight: 1,115 lbs Fluid Capacity: 163 gal Max Fluid Depth: 17.5" Min Fluid Depth: 9.25" Load Lift Over: 37.5" Load Lift Over: 37.5" Pump Voltage: 115 V/ 60 Hz/ 1 PH/ 1 Amp / Fractional HP Pump Voltage: 115 V/ 60 Hz/ 1 PH/ 13.2 Amp / 1.5 HP Heater Voltage: 230 V / 60 Hz / 1 PH / 30 Amp Heater Watts: 3000W Lift Requirements: 25 CFM @ 120 PSI	
ACCESSORIES	• 50 Micron Filter Kit • Industrial Light Kit • Bolt on Light • Flow-Thru Hose & Brush Note: Adjustable thermostat not available with flow-thru brush option. Electrical plug not included.	• 50 Micron Filter Kit • Industrial Light Kit • Bolt on Light • Flow-Thru Hose & Brush Note: Adjustable thermostat not available with flow-thru brush option. Electrical plug not included.	

FEATURES							
Adjustable	Stainless Steel Spring-	Stainless Steel	Filter Regulator with	Adjustable Thermostat	Not to be used with		
Agitation Speed	Loaded Door Closures	Immersion Spray Bars	Auto Drain		Chlorinated Solvents		

#### Call your Safety-Kleen representative today for a free assessment.

### SAFETY-KLEEN.COM | (877) 669-5705





© 2020 Safety-Kleen Systems, Inc., a Clean Harbors Company. All Rights Reserved. All information contained herein was current at the time of the publication. Safety-Kleen Systems, Inc. reserves the right to add, delete, modify or revise the products and services available without prior notice or obligation.